


CT2100/2110/2120/2130/2140/ 2150 and 2SC.ES/EL Pre-Installation Requirements

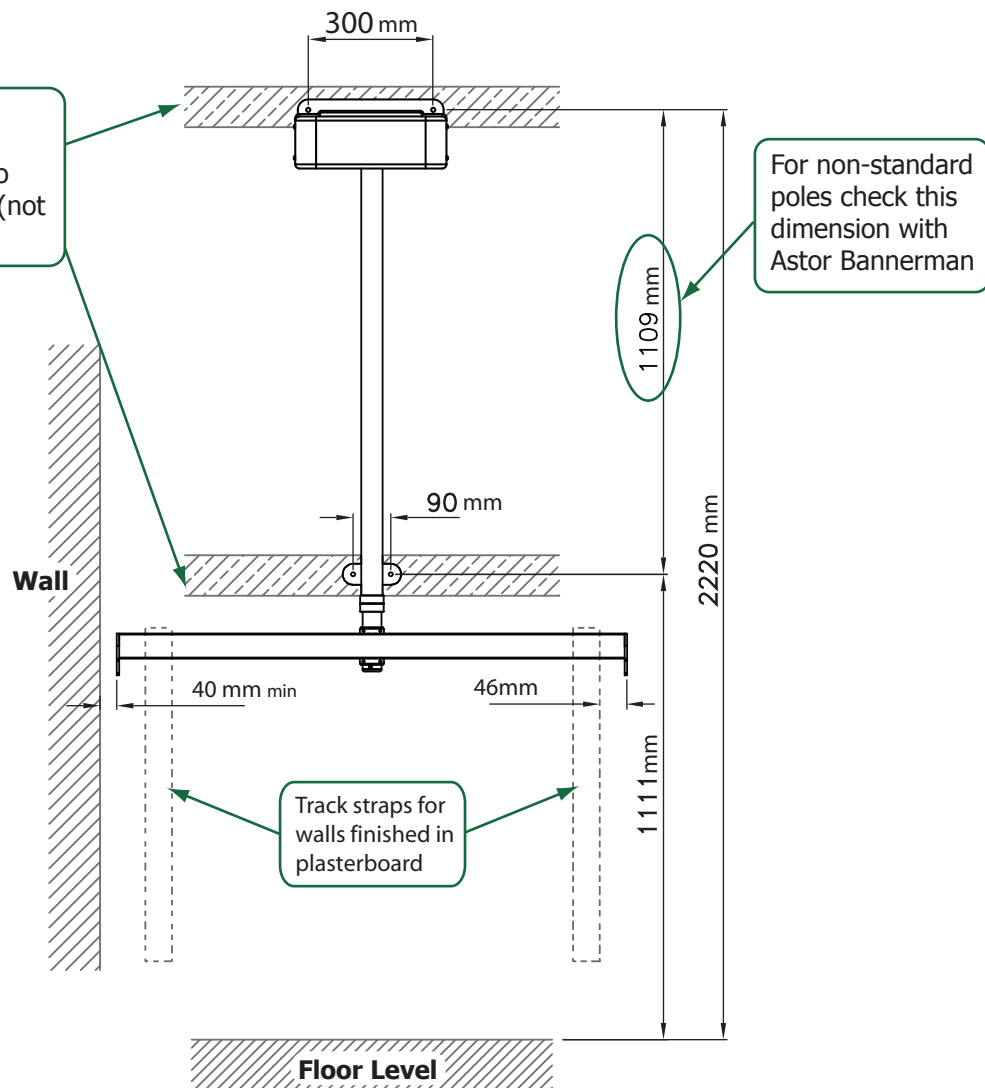

Electrics

Astor Bannerman provide a separate 24 volt transformer which connects to the top of the unit. The transformer provided must be fitted outside of a wet room. Preferably the transformer will be installed in a false ceiling/loft above. You will need to provide a 30mA RCD protected, waterproof mains outlet within 1 metre of the transformer for the transformer to connect to.

Fixing

The changing table should be fixed to a load bearing wall (ie. strong enough to carry a 150kg load on wall fixing) which is flat and free from obstruction from floor level up to 2320mm. If the changing table must be mounted on a stud wall, the wall will need special reinforcement. Either noggins should be placed in the wall as shown above or 25mm (1 inch) marine or exterior plywood should be used to cover the entire fixing area down to the floor. The wall should be finished before equipment installation.

This sheet must be completed and returned before installation can take place

Please read and check the sections below
carefully before ticking each box



Wall

- 1. The finished wall is load bearing and free of obstructions from floor level up to 2320mm
- or
- 2. The wall is of stud-wall construction but strengthened to Astor-Bannerman's specification and no other, please see overleaf for details. Wall is free of obstructions from floor level up to 2320mm
- or
- 3. The finished wall is plasterboard and will need additional track straps

Electrics

- 1. A 30mA fused mains outlet is provided within 1 metre of the fixing position at ceiling height in the room of installation
- or
- 2. A 30mA RCD protected fused mains outlet is provided **OUTSIDE** the room (adjacent room or loft over) within 1 metre of the unit at ceiling height and a 10mm hole has been drilled through the wall at ceiling height above the unit on the centre line of the fixing position

Access

- 1. The unit is not required to be installed upstairs/through difficult access
- or
- 2. The unit is required to be installed upstairs/through difficult access but necessary arrangements have been made to assist the Astor-Bannerman engineer

IMPORTANT

We confirm that 240 volt mains power supply (not temporary supply) and will be connected and operational BEFORE the Astor-Bannerman engineer visits. Please contact Astor-Bannerman if you are ordering an optional watertray as there are additional requirements.

This last box must be ticked before we are able to release the goods for installation We understand that any waiting time will be charged to us and should the site require a second visit due to the above requirements not being met an additional £350.00 per visit will be charged and we agree to pay those charges.

Signed Date

Print name Job number

Site address

.....