


Nivano CTe

Pre Installation Requirements

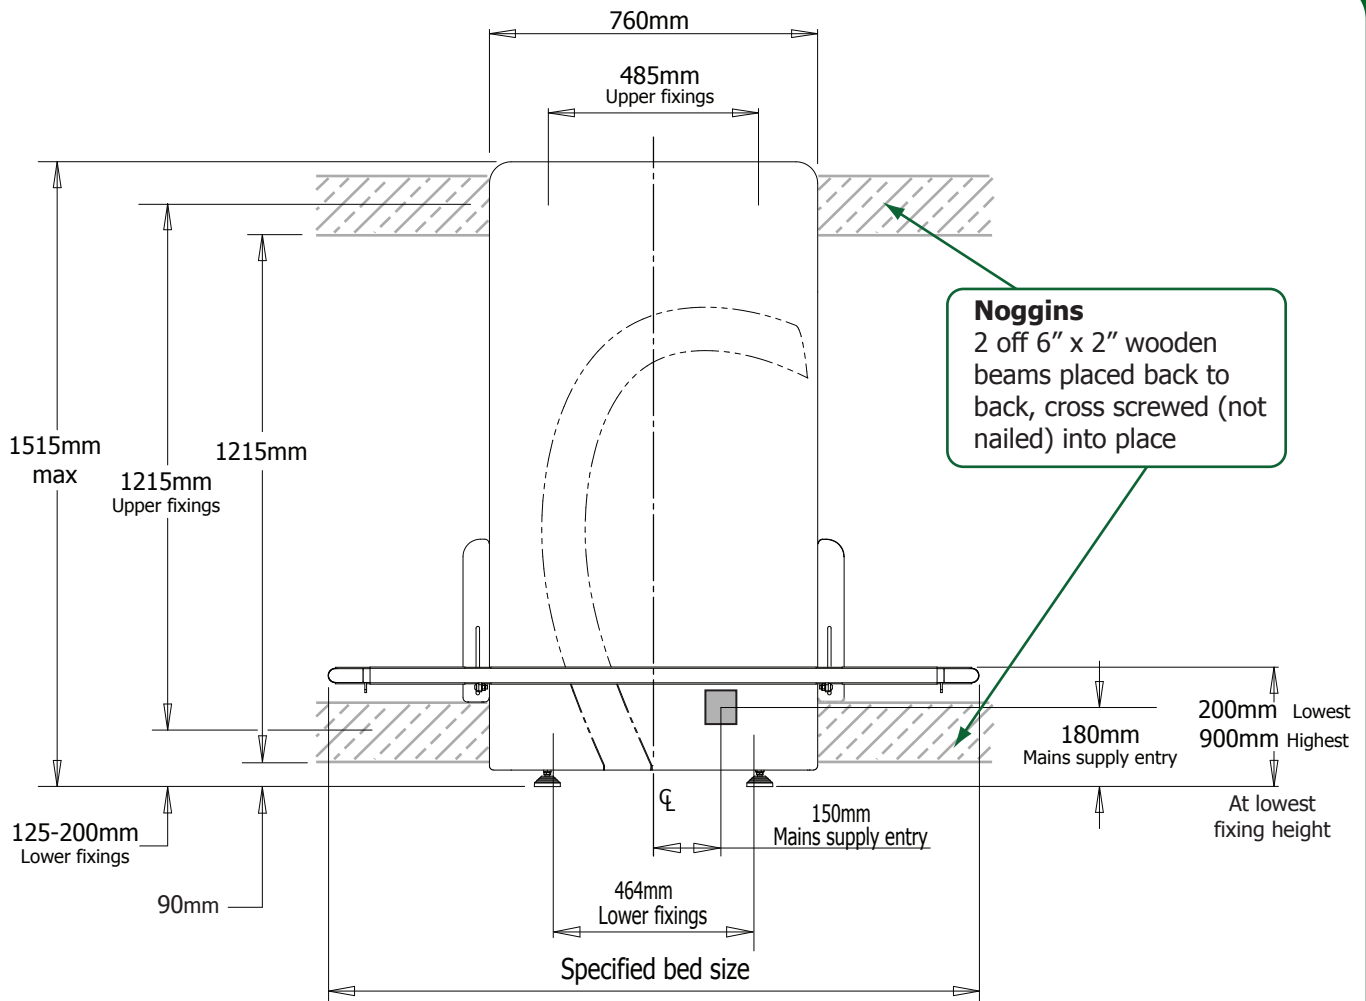

Electrics

The Nivano is supplied with mains electric (240v) and transformed to 24v within the unit. A 30mA RCD protected mains circuit is required. A flush mounted fused spur with flex outlet cover is required on the wall behind the unit at a height of 180mm from the floor 150mm to the right of the centreline.

Fixing.

The Nivano is fixed to the wall but also rests on the floor. The wall to which it is fitted should be load bearing (i.e. strong enough to carry a 100kg load on each wall fixing), flat and free from obstruction from floor level to 1550mm above the floor and a minimum of 50mm wider than the specified bed size. If the Nivano needs to be fitted to a stud wall, the wall will need special reinforcement; either noggins as shown above; or 25mm (1 inch) marine or exterior plywood, secured every 200mm, should be used to cover the area behind the unit and extend 100mm either side of the unit. The plywood support must be in contact with, and supported by the floor

This sheet must be completed and returned before installation can take place

Please read and check the sections below carefully before ticking each box



Wall

- 1. The wall is load bearing and free of obstructions 0-1550mm from the floor.
- or
- 2. The wall is of stud-wall construction but strengthened to Astor-Bannerman's specification and no other, please see overleaf for details. Wall is free of obstructions 0-1550mm from the floor.

Floor

- 1. The floor will be finished ready for the Nivano to be fitted.
- 2. The floor is of concrete/wooden construction (delete as appropriate).

Electrics

- 1. A 30mA RCD protected mains fused spur is provided with a flush mounted flex outlet cover behind the unit at a height of 180mm from the floor and 150mm to the right of the centreline.

Access

- 1. The unit is not required to be installed upstairs/through difficult access.
- or
- 2. The unit is required to be installed upstairs/through difficult access but necessary handling arrangements have been made to assist the Astor-Bannerman engineer.

IMPORTANT

We confirm that 240 volt mains power supply (not temporary supply) and will be connected and operational BEFORE the Astor-Bannerman engineer visits. Please contact Astor-Bannerman if you are ordering an optional watertray as there are additional requirements.

This last box must be ticked before we are able to release the goods for installation We understand that any waiting time will be charged to us and should the site require a second visit due to the above requirements not being met an additional £350.00 per visit will be charged and we agree to pay those charges.

Signed Date

Print name Job number

Site address

.....