


Interbath Height Adjustable Bath

Pre Installation Requirements

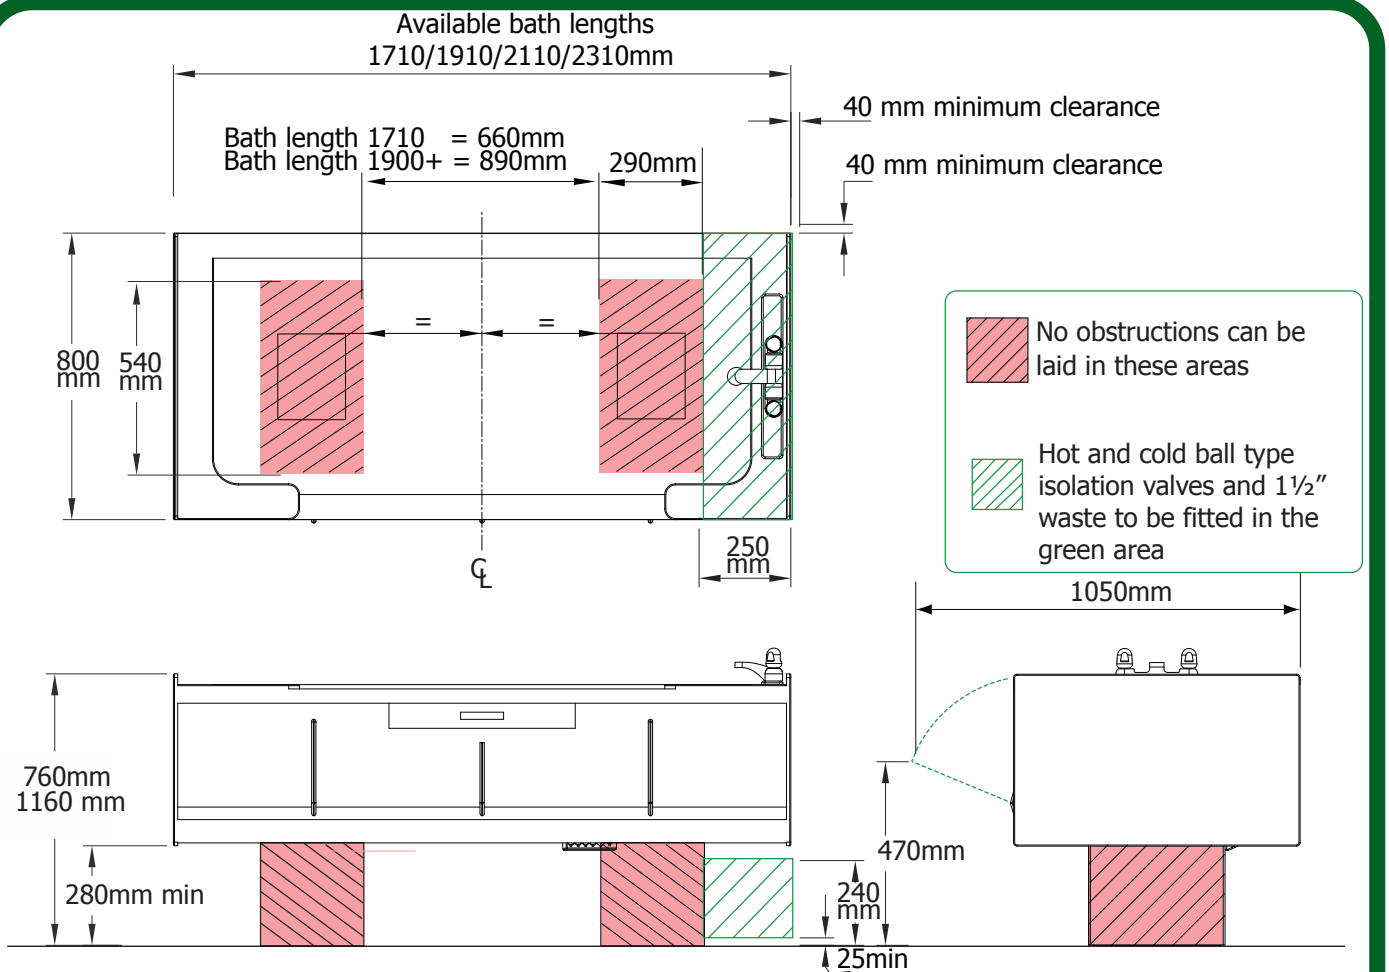

Plumbing

Hot and cold ball type isolation valves (22mm) need to be mounted entirely within the green hatched area shown above maximum height of 240mm from the floor. The waste also needs to be fitted entirely within the green hatched area shown above - max. height of 240mm from the floor. Note that some baths require twin wastes - ask for details. No obstructions can be laid in the areas hatched red.

Thermostatic taps require a minimum water pressure of 1 bar (14.5psi) and maximum of 10 bar (145psi). Maximum pressure ratio; cold : hot must not exceed 5:1

Electrics

We require a 230 volt mains supply from a 30mA RCD protected waterproof fused outlet located adjacent to and within 3 metres of the bath.

Fixing

The Interbath is floor standing and secured to the floor. Floors must flat and level with sufficient depth to accept 40mm long M8 expansion bolts (please indicate any under-floor heating so that alternative arrangements can be made). Walls need to be plumb, smooth and clear of obstructions from floor level to 1160mm. Skirting boards may be left in place and the wall (if required) must be tiled before installation.

Interbath Height Adjustable Bath

Pre Installation check sheet



This sheet must be completed and returned before installation can take place

Please read and check the sections below carefully before ticking each box



Wall

1. Walls are free of obstructions 0-1160mm from the floor

Floor

1. The floor is finished, free of obstructions in the red areas and suitable for 40mm long bolts.

2. The floor is of concrete/wooden construction (delete as appropriate)

3. Is there under-floor heating in the area of proposed installation? Yes No

Electrics

1. A 30mA RCD protected fused spur with waterproof flex outlet is provided adjacent to the bath & within 3 metres
Please identify location

2. We are willing to have the Astor-Bannerman installer fit flex encased in surface conduit from the site of the outlet (in point 1 above) to the bath.

Plumbing

1. Hot and cold supplies are installed in shaded areas shown overleaf terminating in ball type isolation valves (22mm) up to a max. height of 240mm from the floor

2. 1½" waste is installed in shaded areas shown overleaf up to a max. height of 240mm from the floor

Access

1. The unit is not required to be installed upstairs/through difficult access
or

2. The unit is required to be installed upstairs/through difficult access but necessary arrangements have been made to assist the Astor-Bannerman engineer

3. The bath will be used as part of a single user environment a multi user environment

IMPORTANT

We confirm that 230 volt mains power supply (not temporary supply), hot and cold water supplies and waste pipe will be connected and operational BEFORE the Astor-Bannerman engineer visits.

This last box must be ticked before we are able to release the goods for installation We understand that any waiting time will be charged to us and should the site require a second visit due to the above requirements not being met an additional £350.00 per visit will be charged and we agree to pay those charges.

Signed Date

Print name Job number

Site address

.....