


ABW6/ABW6SP

Pre Installation Requirements

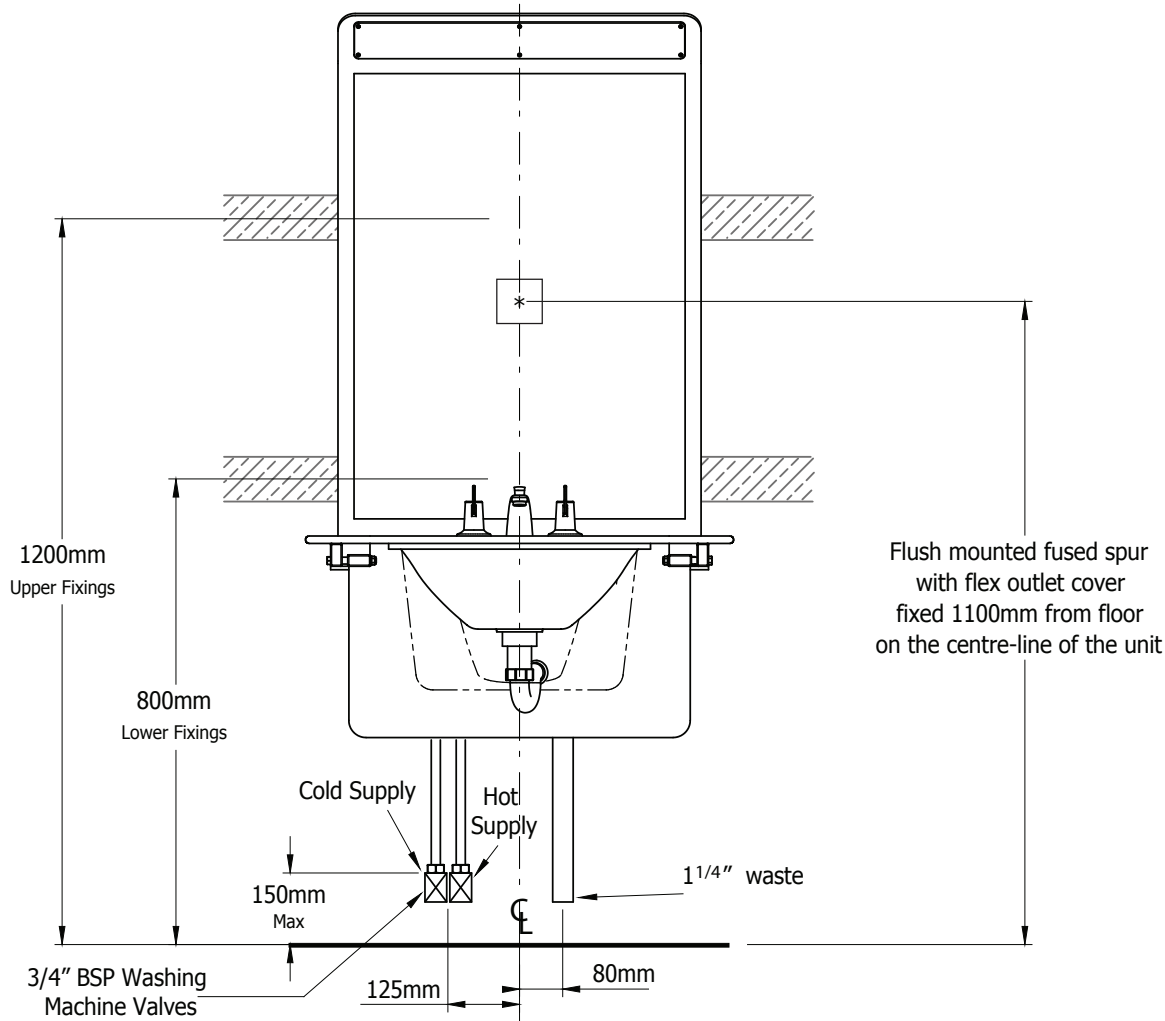

Plumbing

Fit hot (on right) and cold (on left) outlets terminating with 3/4" BSP washing machine isolation valves pointing upwards at 150mm max. above the floor and offset to the **left** of the centre line of the unit by 125mm. These feeds will be enclosed by 50x75mm trunking by the Astor-Bannerman installation engineer. A 1 1/4" waste pipe needs to be fitted at 150mm max. above the floor but offset to the **right** of the centre line of the unit by 80mm.

Electrics

The ABW6 is supplied with mains electric (240v) and transformed to 24v within the unit. A battery backup is fitted as standard. A 30mA RCD protected mains circuit is required. A flush mounted fused spur with flex outlet cover is required on the wall behind the unit at a height of 1100mm from the floor on the centreline of the unit.

Fixing

The basin assembly should be fixed to a load bearing wall (ie. strong enough to carry a 100kg load on wall fixing) which is flat and free from obstruction from 200mm – 2200mm above the floor. If the basin needs to be fixed to a stud wall, the wall will need special reinforcement; either noggins as shown above or 25mm (1 inch) marine or exterior plywood should be used to cover the fixing area, secured to the wall every 200mm.

ABW6/ABW6SP Pre Installation Checksheet



This sheet must be completed and returned before installation can take place

Please read and check the sections below carefully before ticking each box



Wall

- 1. The wall is load bearing and free of obstructions 200-2200mm from the floor.
- or
- 2. The wall is of stud-wall construction but strengthened to Astor-Bannerman's specification and no other, please see overleaf for details.

Electrics

- 1. A 30mA RCD protected mains fused spur is provided with a flush mounted flex outlet cover behind and on the centre line of the unit at a height of 1100mm.

Plumbing

- 1. Hot and cold supplies are installed up to a maximum of 150mm from the floor, offset to the **left** of the centre line of the unit by 125mm, and terminating in 3/4" BSP washing machine isolation valves pointing upwards. Cold supply is on the left, hot supply is on the right.
- and
- 2. 1 1/4" waste is installed up to a maximum of 150mm from the floor and offset to the **right** of the centre line of the unit by 80mm.

Access

- 1. The unit is not required to be installed upstairs/through difficult access.
- or
- 2. The unit is required to be installed upstairs/through difficult access but necessary arrangements have been made to assist the Astor-Bannerman engineer.

IMPORTANT

We confirm that 240 volt mains power supply (not temporary supply), hot and cold water supplies and waste pipe will be connected and operational BEFORE the Astor-Bannerman engineer visits.

This last box must be ticked before we are able to release the goods for installation

We understand that any waiting time will be charged to us and should the site require a second visit due to the above requirements not being met an additional £350.00 per visit will be charged and we agree to pay those charges.

Please note: Following installation, 240 volt mains supply must remain switched **ON** to maintain constant charging of the system batteries.

Signed Date

Print name Job number

Site address

.....